




R240技术数据 R240 TECHNICAL DATA

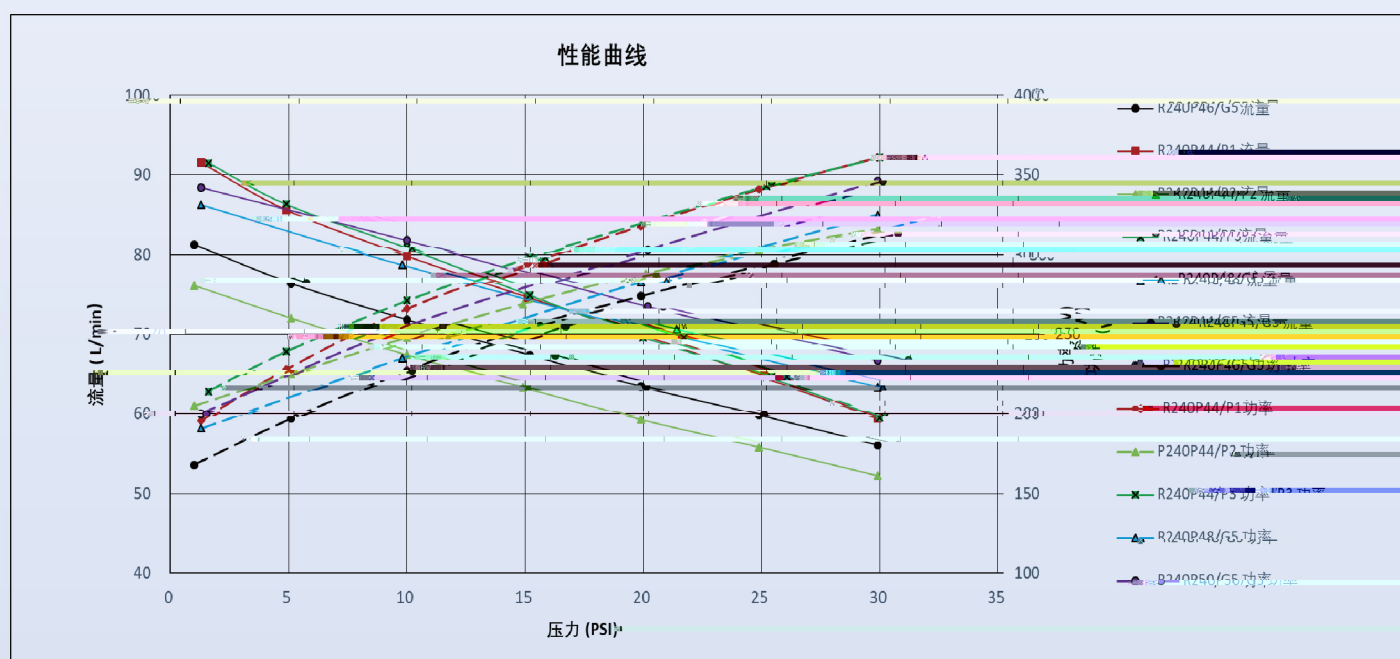


型号	R240P46-1231G5	R260P44-1231P2	R260P44-1231P1	R280P44-1231P1	R240P48-0	R240P53-0
基本结构形式	双头并联	双头并联	双头并联	双头并联	双头并联	双头并联
电压/频率	220V 50HZ	220V 50HZ	115V 60HZ	230V 60HZ	220V 50HZ	220V 50HZ
额定电流(A)	1.44	1.52	3.25	1.50	1.50	1.60
额定功率(W)	315	330	331	331	335	346
最大流量(l/min)	82.86	81.07	93.57	93.8	83.79	88.56
额定流量(l/min)	56.12	58.24	58.42	58.42	58.28	58.71
额定压力	30 psi (2.1 bar)	30 psi (2.1 bar)	30 psi (2.1 bar)	30 psi (2.1bar)	30 psi	30 psi
额定转速(rpm)	1493	1335	1688	1650	1500	1575
噪音	<56 dB(A)					
最大启动压力	0 PSI					
电机数据						
结构形式	P-310(12.5in)	P-310(12.5in)	P-310(12.5in)	P-310(12.5in)	P-310(12.5in)	P-310(12.5in)
防护等级	B					
热保护温度	120°C					
电源线	棕色/蓝色线 16AWG					
电容线)	红色、红色， 18AWG					

常规数据

工作温度范围	-5°C~40°C(41°F~104°F)					
安全认证	CE					
净重	5.2KG		4.6KG			5.1KG
尺寸(含进气管)	220 X 119 X 164					

R240产品尺寸 R240 PRODUCT SIZE

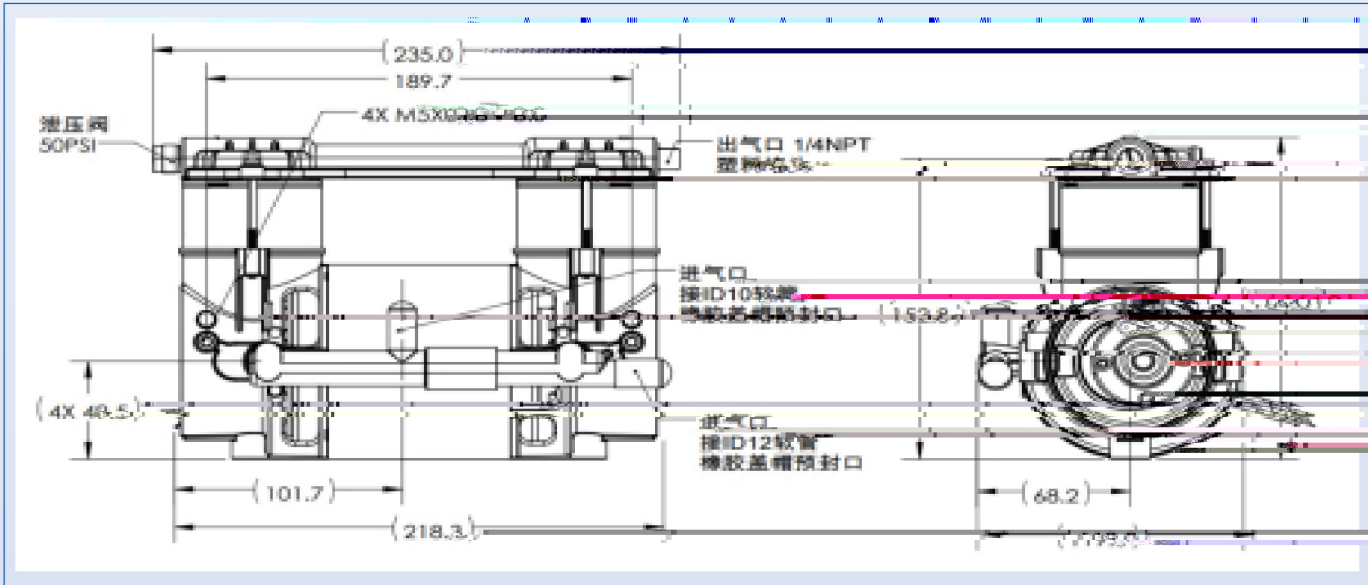

*注:R240P44总长缩短15MM